




**GOUPIL**

**Goupil G4 M - Tipper**  
with 500 L tank for watering and/or high pressure washer  
L7e-CU homologation



## DIMENSIONS

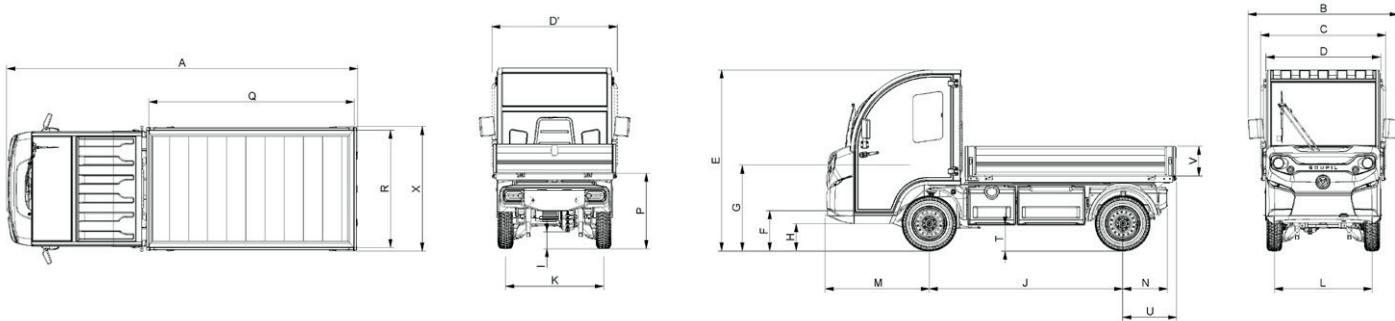

DIMENSIONS	A	B	C	D*	D**	E	F	G	H	I	J	K	L	M	N	P	Q	R	T	U	V	X
mm	3,675	1,574	1,305	1,200	1,305	1,893	423	897	288	175	2,022	1,045	1,045	1,089	468	788	2,147	1,222	282	564	308	1,298

## TECHNICAL OVERVIEW

### CHASSIS | CAB

Homologation	L7e-CU		
Maximum speed	50 km/h		
External turning radius (kerb to kerb)	3,900 mm		

### G4 TIPPER

Battery type	Lead acid, 2V traction cells			Lithium LiFePo4		
Battery capacity	8.6 kWh	11.5 kWh	15.4 kWh	9 kWh	14 kWh	21 kWh
Charging time on household socket	8h30 @ 7 A	8h30 @ 10 A	9h45 @ 10 A	4h15 @ 13 A	6h30 @ 13 A	9h00 @ 13 A
Maximum permissible mass	2,100 kg	2,100 kg	2,100 kg	1,800 kg	1,800 kg	1,800 kg
Actual vehicle mass	1,170 kg	1,263 kg	1,337 kg	952 kg	984 kg	1,009 kg
Payload capacity**	930 kg	837 kg	763 kg	848 kg	816 kg	791 kg
Tow load capacity for road approved trailers with or without brakes	291 kg	291 kg	291 kg	291 kg	291 kg	291 kg

### G4 TIPPER DIMENSIONS

### CAGE BODY DIMENSIONS (OPTIONAL)

Load dimensions	Length: 2,147 mm   Width: 1,222 mm   Height: 308 mm	Standard mesh	Standard solid	Half-height mesh
Weight of the equipment	127 kg	Cage body weight	41 kg	40 kg
Loading area	2.6 m <sup>2</sup>	Height with cage body	1,108 mm	1,108 mm
Maximum tipping angle	47 °	Useful body with cage body	2.9 m <sup>3</sup>	2.9 m <sup>3</sup>
Load bed lifting time	12 seconds	Max height load bed raised with cage		3,089 mm
		Max height load bed raised without cage		2,545 mm

### WATERING WITH 500 L TANK | 25 m, ø 16 mm hose with automatic self-wind

### HIGH-PRESSURE WASHER WITH 500 L TANK | 15 m, ø 8 mm hose with automatic self-wind

Weight of the equipment	135 kg	Weight of the equipment	140 kg
Flow rate	30 litres/minute	Flow rate	7 litres/minute
Pressure (in use)	2.5 bar	Pressure	130 bar
Sound level (3 m)	60 dB	Sound level (3 m)	65 dB
Motor pump	0.37 kW - 48 V @ 2,900 rpm	Motor (S2-30 min)	2.2 kW - 48 V
Range (with 14 kWh batteries)	31h non-stop	Range (with 14 kWh batteries)	5h20 non-stop

- Spray lance storage on RHS
- Rotomolded and ride-on tank - no water motion
- Brushes/shovels can be stored underneath the tank
- Spray lance with integrated vacuum system for the detergent

Weight of watering system + high pressure washer with 500 L water tank - 163 kg

For watering and HP washer: fork lift pockets and lifting eyes to enable removal proving the instructions of the user manual are followed. The watering and high pressure washer options cannot be used simultaneously.

### STANDARD

- Reinforced aluminium load bed
- Aluminium dropdown and detachable side and rear gates
- Cab mounted tipper controller on wander lead
- Hydraulic cylinder including safety valve and stand (compliant with 3.5t standards)

### OPTIONS & ACCESSORIES

- Standard mesh cage body
- Standard solid cage body
- Half-height mesh cage body
- Net on cage body
- Tie-down rings



\*D: N1 approval. D\*: L7e-CU approval. \*\*Payload includes the driver (75 kg) + L7e-CU options (60 kg). Any information or other data provided in this document is non-binding and subject to modification at any time. February 2022.

Goupil | 2445 Avenue de la Vallée du Lot 47320 Bourranc - France | +33 (0)5 53 79 39 39 | SAS au capital de 4 000 000 € | RC AGEN B 421 204 041 | Siret : 421 204 041 00063