




DIMENSIONS

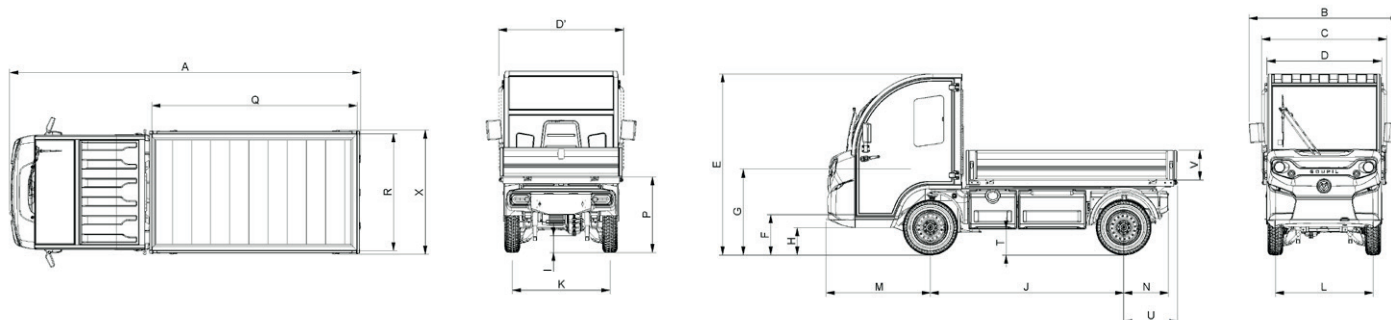

DIMENSIONS	A	B	C	D*	D**	E	F	G	H	I	J	K	L	M	N	P	Q	R	T	U	V	X
mm	3,675	1,574	1,305	1,200	1,305	1,893	423	897	288	175	2,022	1,045	1,045	1,089	468	788	2,147	1,222	282	564	308	1,298

TECHNICAL OVERVIEW

CHASSIS | CAB

Homologation	L7e-CU
Maximum speed	50 km/h
External turning radius (kerb to kerb)	3,900 mm

G4 TIPPER

Battery type	Lead acid, 2 V traction cells			Lithium LiFePo4		
Battery capacity	8.6 kWh	11.5 kWh	15.4 kWh	9 kWh	14 kWh	21 kWh
Charging time on household socket	8h30 @ 7 A	8h30 @ 10 A	9h45 @ 10 A	4h15 @ 13 A	6h30 @ 13 A	9h00 @ 13 A
Maximum permissible mass	2,100 kg	2,100 kg	2,100 kg	1,800 kg	1,800 kg	1,800 kg
Actual vehicle mass	1,170 kg	1,263 kg	1,337 kg	952 kg	984 kg	1,009 kg
Payload capacity**	930 kg	837 kg	763 kg	848 kg	816 kg	791 kg
Tow load capacity for road approved trailers with or without brakes	291 kg	291 kg	291 kg	291 kg	291 kg	291 kg

G4 TIPPER DIMENSIONS

Length	2,147 mm
Width	1,222 mm
Height	308 mm
Weight of the equipment	127 kg
Loading area	2.6 m²
Maximum tipping angle	47 °
Load bed lifting time	12 seconds

CAGE BODY DIMENSIONS (OPTIONAL)

Cage body type	Mesh standard cage body	Solid standard cage body	Mesh half-height cage body
Cage body weight	41 kg	40 kg	31 kg
Height with cage body	1,108 mm	1,108 mm	708 mm
Useful volume with cage body	2.9 m³	2.9 m³	1.85 m³
Max height load bed raised with cage body	3,089 mm	3,089 mm	3,089 mm
Max height load bed raised without cage body	2,545 mm	2,545 mm	2,545 mm

STANDARD

- Reinforced aluminium load bed
- Aluminium dropdown and detachable side and rear gates
- Cab mounted tipper controller on wander lead
- Hydraulic cylinder including safety valve and stand (compliant with 3.5t standards)
- Hydraulic cylinder lifting capacity limited to 1,000 kg with spreading load

OPTIONS & ACCESSORIES

- Mesh or solid standard cage body
- Mesh half-height mesh cage body
- Canvas on cage body
- Net on cage body
- 4 tiedown rings
- Watering system with 500 L tank
- High pressure washer with 500 L tank



D: N1 approval. D: L7e-CU approval. **Payload includes the driver (75 kg) + L7e-CU options (60 kg). Any information or other data provided in this document is non-binding and subject to modification at any time. February 2022.

Goupil | 2445 Avenue de la Vallée du Lot 47320 Bourran - France | +33 (0)5 53 79 39 39 | SAS au capital de 4 000 000 € | RC AGEN B 421 204 041 | Siret : 421 204 041 00063